
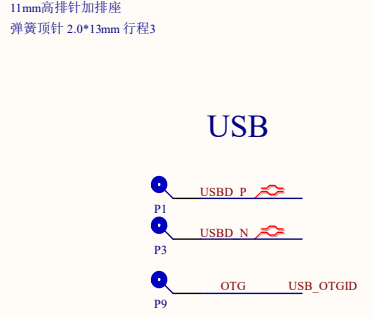
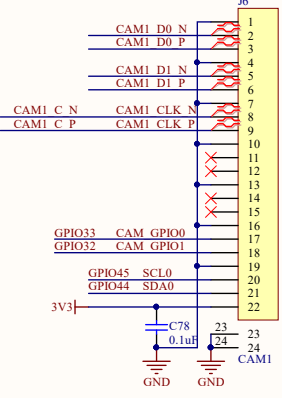


Waveshare Zero-to-CM3-Adapter V2

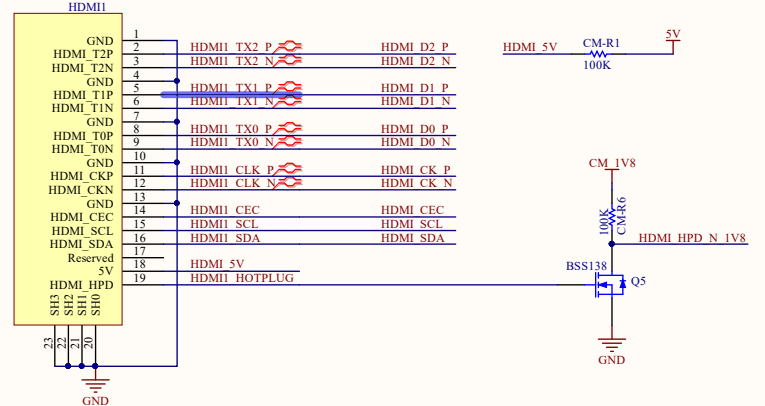

Interface

wiringPi	BCM	PIN	GPIO
3	3	3	3
8	va:0/vb:2	8	8
9	va:1/vb:3	9	9
7	4	7	4
GND	GND		
0	17	0	17
2	va:2/vb:27	2	2
3	22	3	22
3	3	3	3
12	10	12	10
13	9	13	9
14	11	14	11
GND	GND		
ID_SD/30	ID_SD	21	5
21	5	21	5
22	6	22	6
23	13	23	13
24	19	24	19
25	26	25	26
GND	GND		

3V3	CM	3V3	3.3V	P2	5V	CM	VBAT
GPIO2	P	SDA	2	1	5V		
GPIO3	P	SCL	4	3	GND		
GPIO4	P	7	6	5	P TX	GPIO14	
GND	GND	8	7	4	P RX	GPIO15	
GPIO17	P	0	10	9	P1	GPIO18	
GPIO27	P	2	14	13	GND		
GPIO22	P	3	16	15	P4	GPIO23	
GND	GND	3	16	15	P5	GPIO24	
GPIO10	P	MOSI	18	17	GND		
GPIO9	P	MISO	20	19	GND		
GPIO11	P	SCK	22	21	P6	GPIO25	
GND	GND	24	23	8	P CE0	GPIO7	
GPIO0	ID	SD	26	25			
GPIO5	P	21	28	27	ID SC	GPIO1	
GPIO6	P	22	30	29			
GPIO13	P	23	32	31	GND		
GPIO19	P	24	34	33	GND		
GPIO26	P	25	36	35	P27	GPIO16	
GND	GND	40	38	37	P28	GPIO20	
			40	39	P29	GPIO21	

