


Redpine RS9113 IEEE 802.11 b/g/n Module

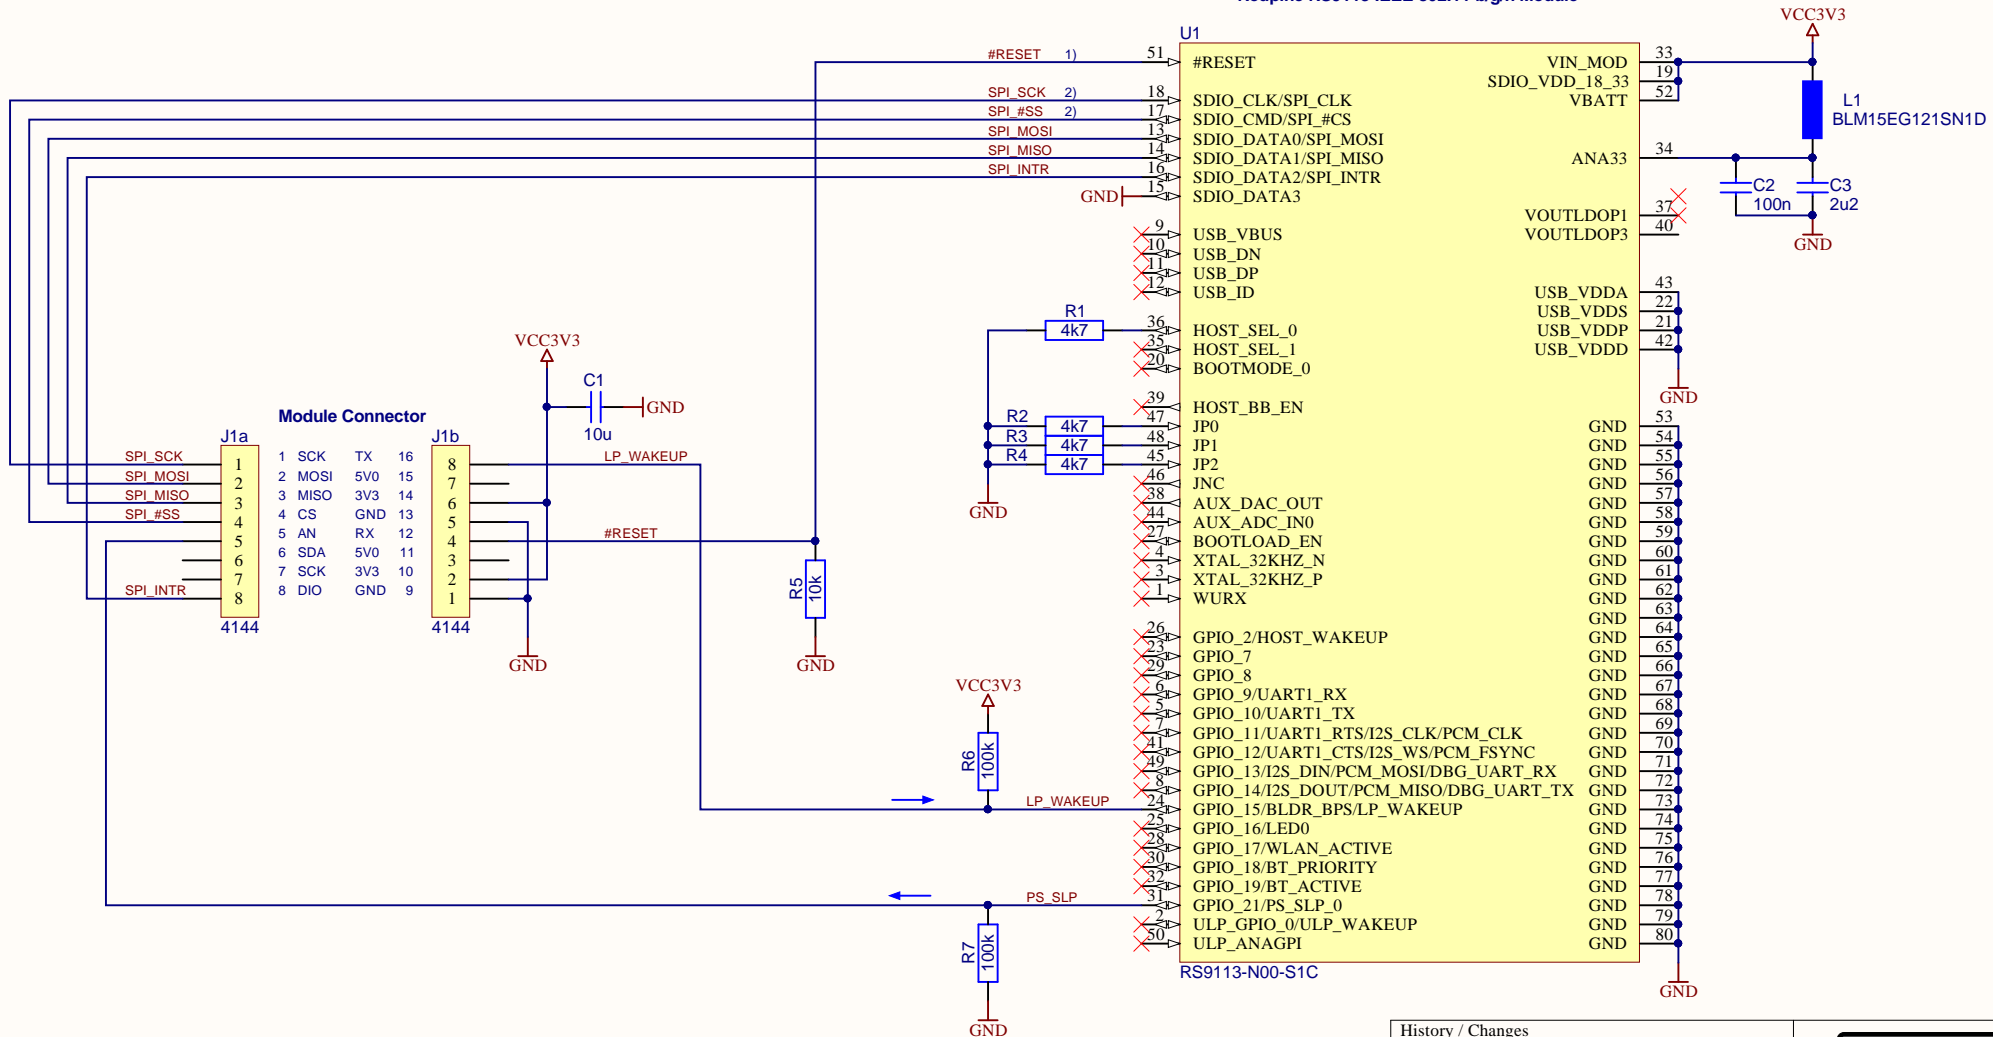


NOTES:

- 1) Insure a minimum reset time of 20ms
- 2) Drive SPI_#CS and SPI_CLK before releasing #RESET

Unless otherwise specified:

- Ceramic capacitors are of type X5R/X7R or C0G/NP0 with a voltage rating of at least 6.3V (100n at least 16V)
- Resistors are 1% tolerance types

History / Changes		 J-Link™ Technology www.segger.com
Rev. A: Added labeling to PCB backside		
Title emPower WiFi Module RS9113		
Size A4	Number -	Revision Rev. A
Date: 160927		Sheet 1 / 1
File: emPower_WiFi_RS9113_RevA.SchDoc		Drawn: VK

