




## FIBER OPTIC PATCHCORD





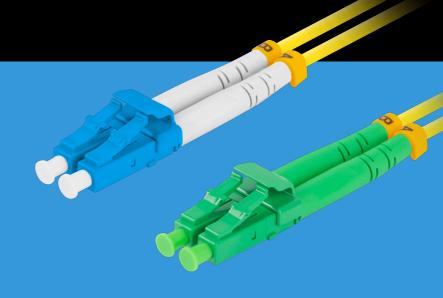

## **PRODUCT FEATURES:**

- Low attenuation of connectors
- Repeatability of transmission parameters
- High bending radius
- Product compliance with IEC/ISO standards
- LSZH (Low Smoke Zero Halogen) outer coating

## **PRODUCT SPECIFICATION:**

Connectors	LC
Cable length	50 cm
Polishing standard	APC, UPC
Fiber optic type	G657A1
Fiber Type	Single-Mode
Fiber diameter	9/125
Cable Construction	Duplex
Cable diameter	3 mm
Coating material	LSZH
Insertion loss	0,2 dB
Return loss	50 dB
Environment temperature	from -40 up to 85 °C
Minimum bend radius	10
Colour	Yellow