

QUECTEL

Wireless Module Expert

M12

Dual-Band GSM/GPRS Module




Dual Band



GPRS Multi-slot Class 12



Highly Compact Size



SMD Type



Embedded TCP, PPP, UDP, FTP Protocols




RoHS Compliant



Serial Port Multiplexer (GSM0710)



Quectel Enhanced AT Commands

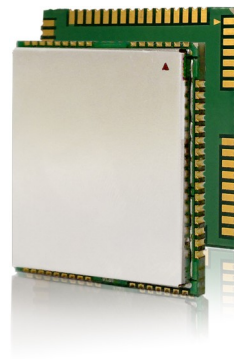

The M12 is a dual-band GSM/GPRS wireless module in SMD type. It is pin-to-pin compatible with the M10 quad-band module. The M12 can be embedded in customer applications, offering good reliability and robustness.

Featuring an industry-standard interface, the M12 delivers GSM/GPRS 900/1800MHz performance for DATA, SMS, Fax and Voice in a small form factor with extremely low power consumption. With a small configuration of **29mm x 29mm x 3.6mm**, the M12 can fit into almost all M2M applications, including VTS, AMR, Wireless POS, Security, etc.

- Dual-band GSM/GPRS module with a size of 29mmx29mmx3.6mm
- SMD type for easier and cheaper SMT production
- Embedded TCP, UDP, PPP, FTP protocols
- Based on mature and field-proven platform

M12

Dual-Band GSM/GPRS Module

General Features

Dual-Band	900/ 1800MHz
GPRS Multi-slot Class	12/10/8
GPRS Mobile Station Class	Class B
Compliant to GSM Phase 2/2+	Class 4 (2W @ 900 MHz) Class 1 (1W @1800MHz)
Supply Voltage Range	3.4~4.5 V 4.0V nominal
Low Power Consumption	1.1mA @ DRX=5 0.7mA @ DRX=9
Operation Temperature	-40 °C to + 80 °C
Dimensions	29mm × 29mm × 3.6mm
Weight	Approx 6g
Control via AT commands (GSM 07.07 ,07.05 and other enhanced AT Commands)	
SIM Application Toolkit	

Specifications for Fax


Group 3, Class 1 & 2

Specifications for Data

GPRS Class 12	max. 85.6 kbps (uplink & downlink)
PBCCH Support	
Coding Schemes	CS 1, 2, 3, 4
CSD	up to 14.4 kbps
USSD	
Non Transparent Mode	
Protocols	PPP TCP/UDP

Specifications for SMS via GSM / GPRS

Point-to-point MO and MT
SMS Cell Broadcast
Text and PDU Mode

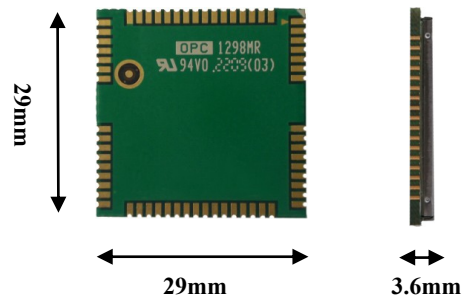

Specifications for Voice

Speech Codec Modes	Half Rate (HR) Full Rate (FR) Enhanced Full Rate (EFR) AMR Half Rate AMR Full Rate
Echo Arithmetic	Echo Cancellation Echo Suppression Noise Reduction
Hands-free Operation	

Interfaces

External SIM	3V/ 1.8V
Analog Audio Interfaces	Two channels
RTC Backup	
Keypad Interface	
LCD Interface	
Serial Port and Debug Port	
Antenna Pad	
GPIOs	

Drivers

MUX Driver

Compatibility

AT Cellular Command Interface

Contact Us

Address	Room 501, Building 13, No.99, Tianzhou Road, Shanghai, China
Email	info@quectel.com
Tel	+86 21 51086236

