


Features

- STM32 microcontroller in LQFP144 package
- SMPS: significantly reduces power consumption in Run mode, by generating Vcore logic supply from an external DC/DC converter. This function is only available on ‘-P’ suffixed boards
- LSE crystal: 32.768 kHz crystal oscillator
- USB OTG FS
- 3 user LEDs
- 2 user and reset push-buttons
- Board connectors:
 - USB with Micro-AB
 - SWD
- Board expansion connectors:
 - ST Zio connector including Arduino™ Uno V3
 - ST morpho
- Flexible power-supply options:
 - ST-LINK USB V_{BUS} or external sources
- On-board ST-LINK/V2-1 debugger/programmer with USB re-enumeration capability: mass storage, virtual COM port and debug port
- Comprehensive free software libraries and examples available with the STM32Cube package
- Support of a wide choice of Integrated Development Environments (IDEs) including IAR™, Keil®, GCC-based IDEs

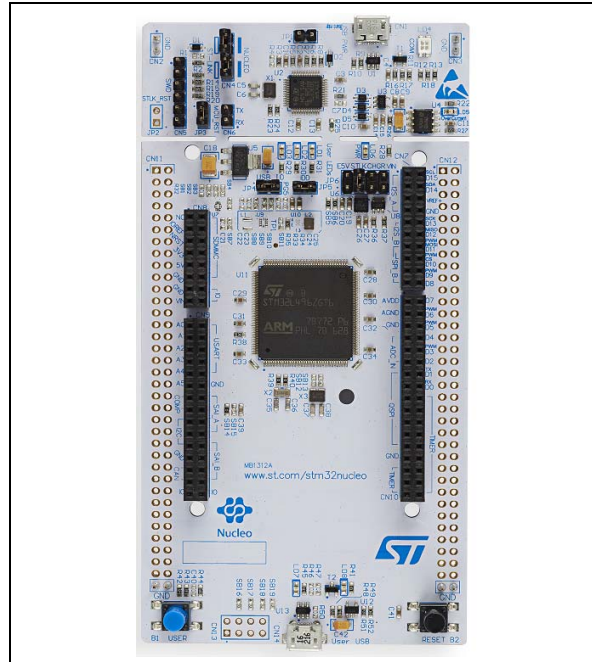

1. Picture is not contractual

The ST Zio connector, which extends the Arduino™ Uno V3 connectivity, and the ST morpho headers provide an easy means of expanding the functionality of the Nucleo open development platform with a wide choice of specialized shields.

The STM32 Nucleo-144 board does not require any separate probe as it integrates the ST-LINK/V2-1 debugger/programmer.

The STM32 Nucleo-144 board comes with the STM32 comprehensive free software libraries and examples available with the STM32Cube package.

Description

The STM32 Nucleo-144 boards (NUCLEO-L496ZG, NUCLEO-L496ZG-P and NUCLEO-L4R5ZI) provide an affordable and flexible way for users to try out new concepts and build prototypes by choosing from the various combinations of performance and power consumption features, provided by the STM32 microcontroller.

Table 1. Device summary

Reference	Part number
NUCLEO-XXXXZX (-P)	NUCLEO-L496ZG, NUCLEO-L496ZG-P, NUCLEO-L4R5ZI

System requirements

- Windows® OS (XP, 7, 8 and 10), Linux® 64-bit or macOS™
- USB Type-A to Micro-B cable

Development toolchains

- Keil® MDK-ARM^(a)
- IAR™ EWARM^(a)
- GCC-based IDEs including free SW4STM32 from AC6

Demonstration software

The demonstration software, included in the STM32Cube package corresponding to the on-board MCU, is preloaded in the STM32 Flash memory for easy demonstration of the device peripherals in standalone mode. The latest versions of the demonstration source code and associated documentation can be downloaded from the www.st.com/stm32nucleo webpage.

Ordering information

To order the Nucleo-144 board corresponding to the targeted STM32, use the order code given below in [Table 2](#).

Table 2. Ordering information

Order code	Target STM32
NUCLEO-L496ZG	STM32L496ZGT6
NUCLEO-L496ZG-P	STM32L496ZGT6P
NUCLEO-L4R5ZI	STM32L4R5ZIT6

The meaning of the NUCLEO-TXXXRY codification is explained in [Table 3](#) with an example.

a. On Windows® only.

Table 3. Codification explanation

NUCLEO-TXXXRY(-P)	Description	Example: NUCLEO-L496ZG-P
TXXX	STM32 product line	STM32L496
R	STM32 package pin count	144 pins
Y	STM32 Flash memory size: – G for 1 Mbyte – I for 2 Mbytes	1 Mbyte
P	STM32 has SMPS function	SMPS

This order code is mentioned on a sticker placed on the top side of the board.

Revision history

Table 4. Document revision history

Date	Revision	Changes
15-Feb-2017	1	Initial version.
16-Mar-2017	2	Document now scopes NUCLEO-L496ZG and NUCLEO-L496ZG-P products. Updated: – cover page features (to cover LL APIs) – cover page description – Table 2: Ordering information – Table 3: Codification explanation .
08-Aug-2017	3	Document now also scopes NUCLEO-L4R5ZI product. Added Table 1: Device summary Updated: – Description – Table 2: Ordering information – Table 3: Codification explanation
30-Aug-2017	4	Updated Table 2: Ordering information .

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved

