


| REV | Description | DATE | BY |
|------|-----------------|------------|------------|
| v1.0 | Initial Version | 2020.08.24 | JIN FUJONG |

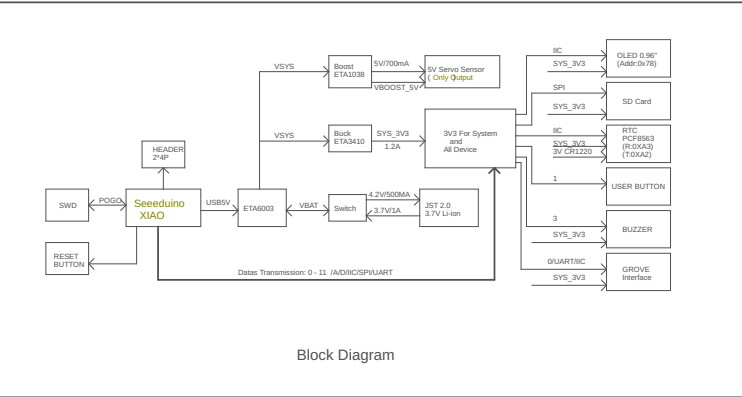

Seed Studio


TITLE: Seedeuino XIA0 Expansion board_v1.0_200824

| | | |
|----------|----------------------|------------|
| CC-BY-SA | Design: | Check: |
| | Date: 20201019 16:56 | Vision: |
| | | Sheet: 1/1 |

Seed Studio

TITLE: Seedeuino XIA0 Expansion board_v1.0_200824

| | | |
|----------|----------------------|------------|
| CC-BY-SA | Design: | Check: |
| | Date: 20201019 16:56 | Vision: |
| | | Sheet: 1/1 |

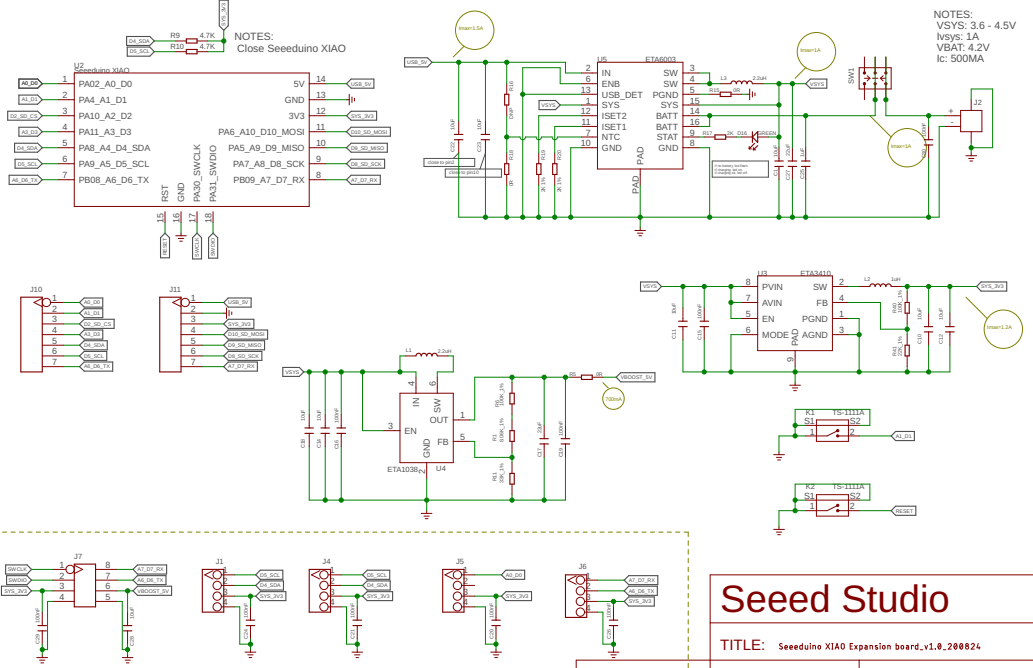


Seed Studio

TITLE: Seedeuino XIA0 Expansion board_v1.0_200824

| | | |
|----------|----------------------|------------|
| CC-BY-SA | Design: | Check: |
| | Date: 20201019 16:56 | Vision: |
| | | Sheet: 1/1 |

Place The Capacitor Close To The Interface

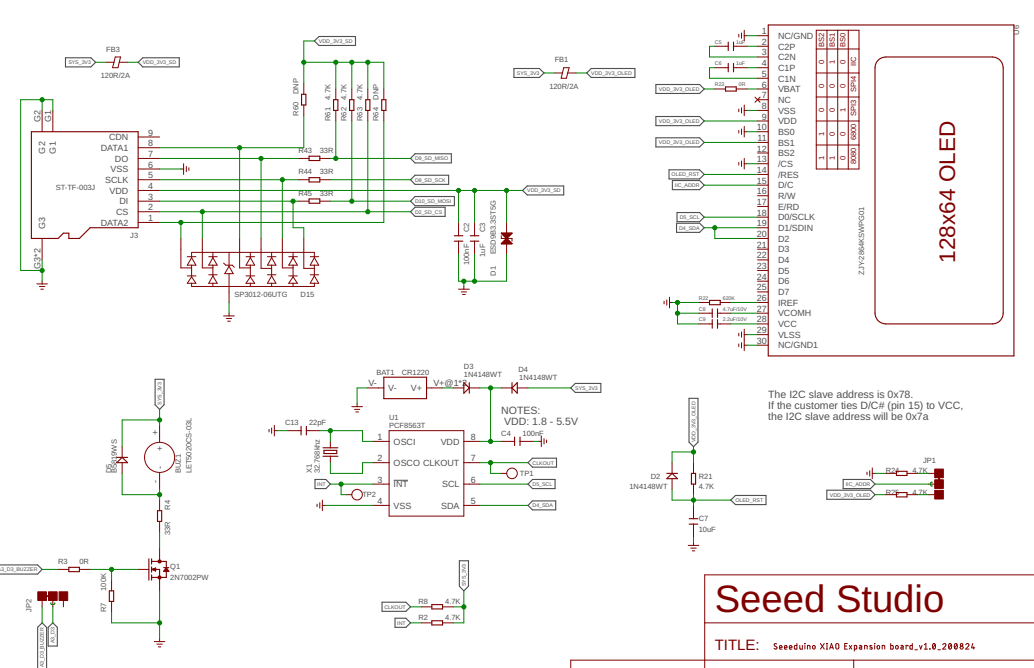

Seed Studio

TITLE: Seedeuino XIA0 Expansion board_v1.0_200824

| | | |
|----------|----------------------|------------|
| CC-BY-SA | Design: | Check: |
| | Date: 20201019 16:56 | Vision: |
| | | Sheet: 1/1 |

The I2C slave address is 0x78.
If the customer ties D1C4 (pin 15) to VCC, the I2C slave address will be 0x7A.